

Cone/Screwthread Adapters

Straight. Suitable for locating plain stem thermometers.

	Thread size	Cone size	Acceptable dia. through screwcap, mm
QST51/13	13	14/23	6.0 to 7.0
QST52/13	13	19/26	6.0 to 7.0
QST53/13	13	24/29	6.0 to 7.0
QST51/18	18	14/23	7.0 to 8.5
QST52/18	18	19/26	7.0 to 8.5
QST53/18	18	24/29	7.0 to 8.5
QST54/18	18	29/32	7.0 to 8.5
QST52/24	24	19/26	10.5 to 11.5
QST53/24	24	24/29	10.5 to 11.5
QST54/24	24	29/32	10.5 to 11.5

This range may also be used as simple stirrer guides provided the silicone ring seal within the screwcap is lubricated.

Stopcock Adapters

Cone/flexible tubing

GP Rotaflo key, bore 3mm. Supplied complete with screwthread connector which has a 9mm o.d. nozzle for tubing attachment.

	Cone size
Screwthread connector	
QMF11/1/ISC	14/23
QMF11/2/ISC	19/26
QMF11/3/ISC	24/29
QMF11/4/ISC	29/32
Right angle screwthread connector	
QMF11/1B/ISC	14/23
QMF11/2B/ISC	19/26
QMF11/3B/ISC	24/29

AD255-10 Spare screwthread tubing connector, polypropylene, 4510/02


AD256-06 Spare silicone sleeve, 4511/02

Socket/flexible tubing

GP Rotaflo key, bore 3mm. Supplied complete with screwthread connector which has a 9mm o.d. nozzle for tubing attachment.

	Socket size
Straight screwthread connector	
QMF14/1/ISC	14/23
QMF14/2/ISC	19/26
QMF14/3/ISC	24/29

Spare keys and safety locks – see QGP series.

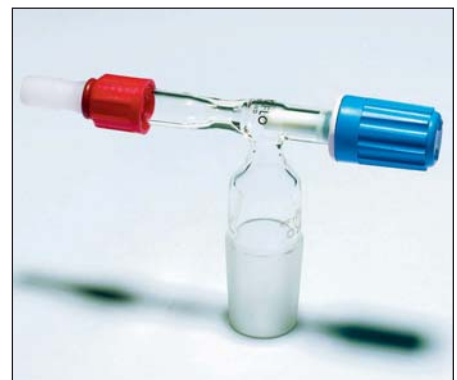


QMF11: BISC



QST51, QST52, QST53



QMF11: ISC

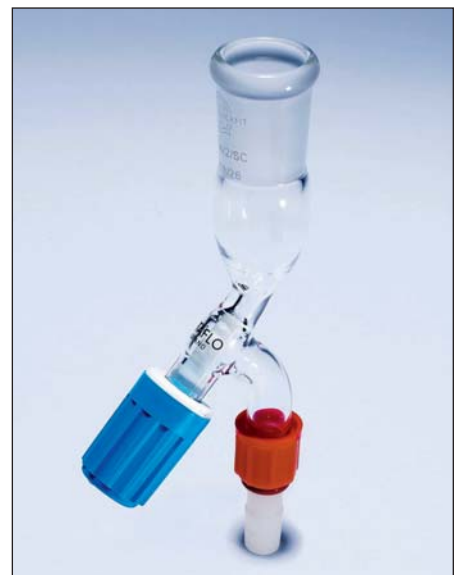

QMF14: ISC